

# CAMO

# **BUILD YOUR DECK UP TO 5X FASTER**

ANY DECK BOARD, SUBSTRUCTURE, DESIGN, OR DESIRED FINISH.

CAMO\* HELPS YOU BUILD BETTER.



### **FASTENERS**

**UNIVERSAL DECK CLIPS & SCREWS** 

Any fastening method for any board.



### **LEVER**°

**BOARD BENDING & LOCKING TOOL** 

DRIVE

Lock any board on wood or metal joists.



# **DRIVE**

STAND-UP DECK FASTENING TOOL


Fasten Collated Edge and Face Screws and CAMO Universal Deck Clips.



# CLIP**DRIVE**"

**FASTENING TOOL FOR CAMO DECK CLIPS** 


Fasten CAMO Universal Deck Clips while standing.

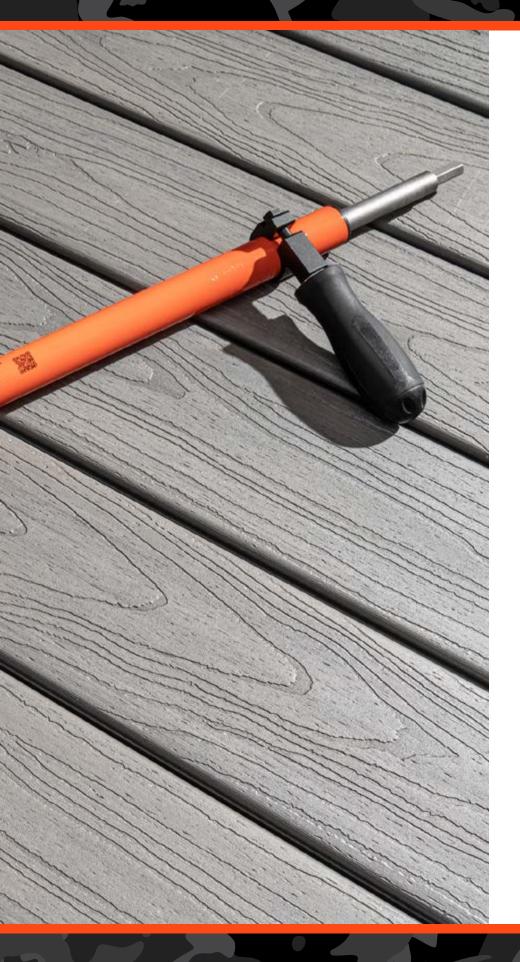


# **CONTENTS**

FASTENER & TOOL SELECTOR	4
DRIVE™ SYSTEMS	6
CLIPDRIVE	6
UNIVERSAL DECK CLIPS	8
DRIVE	10
COLLATED SCREWS	12
DRIVE SYSTEM ACCESSORIES	14
MARKSMAN SYSTEM	16
MARKSMAN PRO TOOLS	17
EDGE SCREWS	18
MARKSMAN ACCESSORIES	20
LEVER*	22
EXTERIOR SCREWS	24
DECK	25
COMPOSITE	27
TRIM	30
STRUCTURAL	34
EXTERIOR ACCESSORIES	36
STAINLESS STEEL FASTENERS	38
DECK SCREWS	40
COMPOSITE SCREWS	42
EDGE SCREWS	44
TRIM SCREWS	45
BITS	48
HAND DRIVE NAILS	49
COLLATED NAILS	50




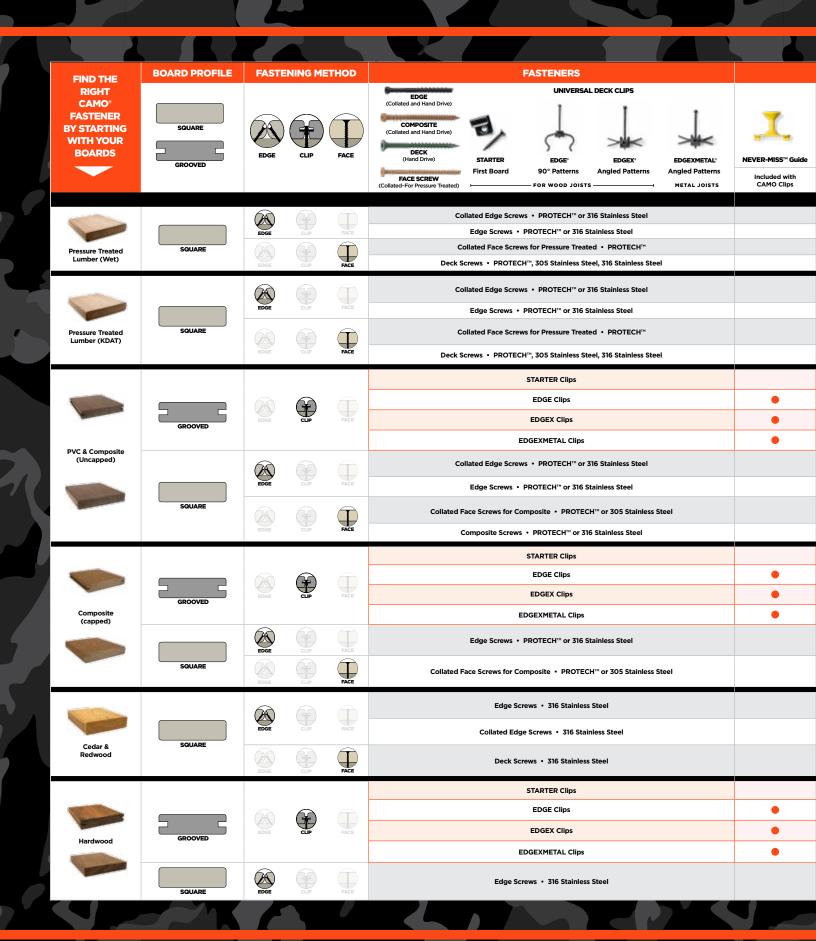

### **FASTENER & TOOL SELECTOR**

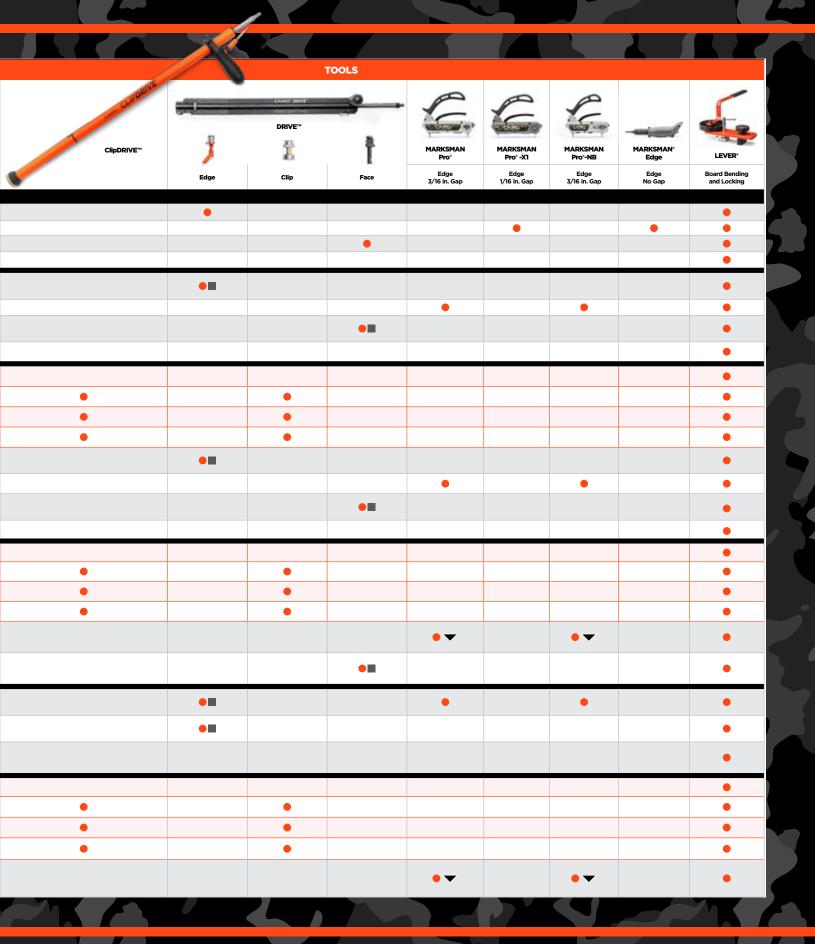



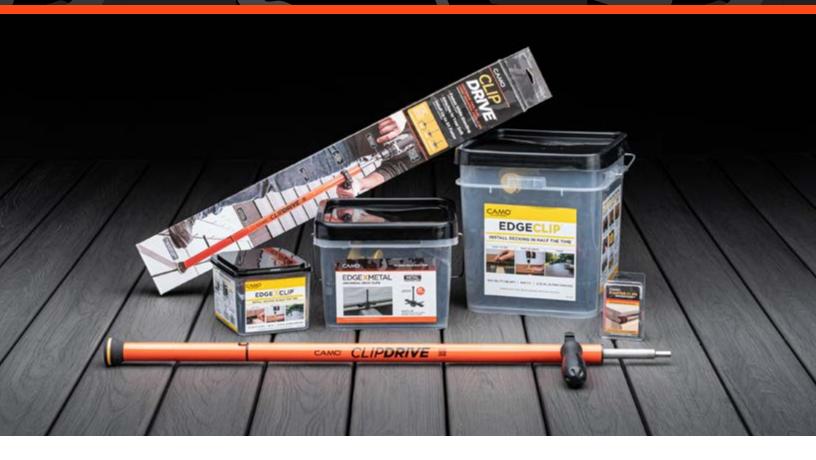


# **CLIPDRIVE**

**FASTENING TOOL FOR CAMO® UNIVERSAL DECK CLIPS** 

The Better Way to Fasten CAMO Universal Deck Clips.

Stand tall, target screws easily, and drive clips up to 5X faster with the CAMO ClipDRIVE $^{\text{\tiny TM}}$ , the contractor-grade tool designed to give you the best experience fastening grooved decking.

### STAND-UP DECK CLIP FASTENING SYSTEM

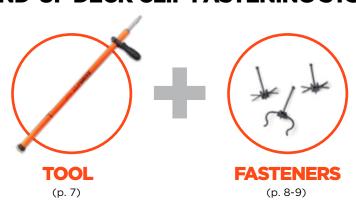



# **ClipDRIVE**<sup>™</sup>

- Install grooved decking up to 5X faster
- ClipDRIVE is engineered for use with CAMO® Universal Deck Clips on leading grooved decking
- The streamlined tool attaches to your drill, features an adjustable handle, and has a weighted nose for easy screw targeting
- Ergonomically designed to be the right fit for every builder, this heavy-duty yet lightweight tool is easy on the body and reduces fatigue on the job
- CAMO Universal Deck Clips and the ClipDRIVE are backed by a CAMO Warranty



SKU#	DESCRIPTION	QTY	CT./MASTER
0345065	ClipDRIVE	1	1

### **FASTEN WITH THE ClipDRIVE**

# ClipDRIVE BUILD YOUR DECK UP TO 5X FASTER USING CAMO LEVER, CLIPS AND ClipDRIVE TOGETHER.









## **UNIVERSAL DECK CLIPS**

CAMO\* deck clips make installing grooved decking on wood or metal joists easy for everyone.

These hidden deck clips are designed and warranted for use with leading grooved decking and result in a beautiful fastener-free surface that you can install in half the time of other hidden fasteners. Fasten  $EDGE^*$ ,  $EDGEX^*$ , and  $EDGEXMETAL^*$  Clips by hand with the included  $NEVER-MISS^*$  Guide or standing up with  $ClipDRIVE^*$ .



INSTALLS WITH NEVER-MISS™ INSTAL
GUIDE (INCLUDED) CLIPDRIVE™







### **STARTER**

- Secure the first and last board to achieve a completely fastener-free deck surface on wood joists
- Designed for use with leading grooved deck boards
- Screw tip bites into joist quickly
- Versatile clip can also be used as an L-bracket



SKU#	DESCRIPTION	COVERAGE	QTY	DRIVER BIT	CT./MASTER
0344087	STARTER Clip - For Wood Joists	30 lineal ft. (9m)	25		6



### **EDGE**®

- 90° deck patterns on wood joists
- One-pass fasteners—clip sits in place on the joist until you're ready to fasten
- Clip creates 3/16 in. (4.7mm) spacing
- Gusset holds boards down
- Fasten with included NEVER-MISS™ Guide or while standing up with the CAMO ClipDRIVE™ or DRIVE™





SKU#	DESCRIPTION	QTY	COVERAGE	DRIVER BIT	CT./MASTER
0344354		90	50 sq. ft. (4.64m²)	1 - T-15	4
0344359	EDGE Clip - 90° Deck Pattern on Wood Joists	450	250 sq. ft. (23.22m²)	2 - T-15	1
0344356		900	500 sq. ft. (46.45m²)	2 - T-15	1



### **EDGEX**®

- · Any deck pattern on wood joists
- One-pass fasteners—clip sits in the groove of the board until you're ready to fasten
- Clip body creates 3/16 in. (4.7mm) spacing
- Gusset holds boards down
- Fasten with included NEVER-MISS™ Guide or while standing up with the CAMO ClipDRIVE™ or DRIVE™





SKU#	DESCRIPTION	QTY	COVERAGE	DRIVER BIT	CT./MASTER
0344554		90	50 sq. ft. (4.64m²)	1 - T-15	4
0344559	EDGEX Clip - Any Deck Pattern on Wood Joists	450	250 sq. ft. (23.22m²)	2 - T-15	1
0344556	11000 001313	900	500 sq. ft. (46.45m²)	2 - T-15	1



### **EDGEXMETAL®**

- Any deck pattern on 14-18GA metal joists
- One-pass fasteners—clip sits in the groove of the board until you're ready to fasten
- Clip body creates 3/16 in. (4.7mm) spacing
- Gusset holds boards down
- Fasten with included NEVER-MISS™ Guide or while standing up with the CAMO ClipDRIVE™ or DRIVE™





SKU#	DESCRIPTION	QTY	COVERAGE	DRIVER BIT	CT./MASTER
0344574	EDGEXMETAL Clip 14-18GA Metal Framing	90	50 sq. ft. (4.64m²)	1 - T-15	4
0344579		450	250 sq. ft. (23.22m²)	2 - T-15	1






### **DRIVE**

#### **DECK FASTENING SYSTEM**

Stand up, save your back and knees, and save your time with the award-winning CAMO® DRIVE™ tool.

The DRIVE tool can be used to fasten boards with CAMO Collated Edge and Face Screws and CAMO Universal Deck Clips while standing up.

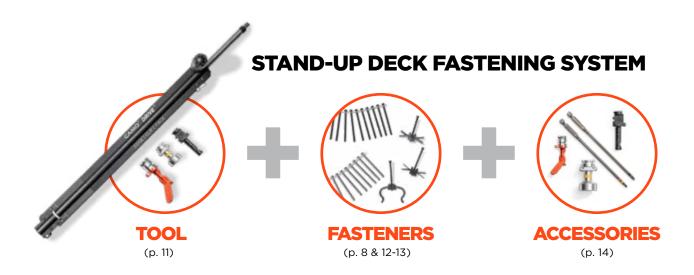




### **DRIVE**

- Install deck boards with the cordless stand-up deck fastening tool that attaches to your drill
- For exclusive use with CAMO Collated Edge Screws, Collated Face Screws, and CAMO Universal Deck Clips
- Use DRIVE to fasten square\* pressure treated, KDAT, cedar, redwood, composite, PVC, and grooved deck boards
- Tool is easy to use, featuring a reversible handle and quick-change nose pieces
- Fastening while standing allows for fast installations that are easy on the body



SKU#	DESCRIPTION	QTY	CT./MASTER
0345060	DRIVE	1	1

### THREE WAYS TO FASTEN WITH DRIVE

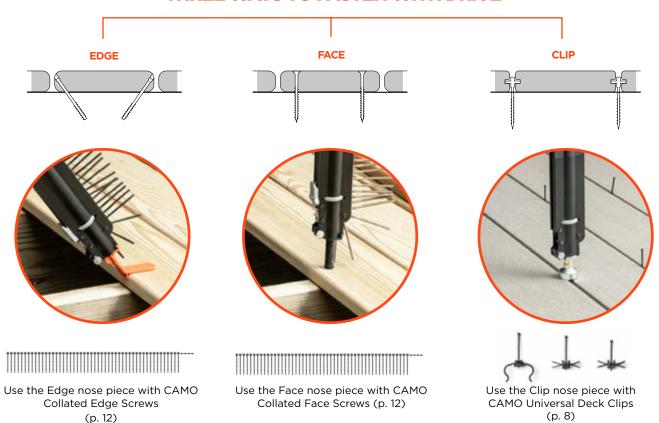

<sup>\*</sup>For most square decking installs, we recommend using secondary spacers to allow for expansion, contraction, and drainage.





# **COLLATED SCREWS**

CAMO Collated screws are exclusively designed for use with the DRIVE tool.

Each fastener was intentionally created and collated for peak performance in its given application. Collated screws are available in 1000 ct. quantities, which cover 285 sq. ft. (26.48 m²) and come with their corresponding driver bits: T-15 for Edge Screws and T-20 for Face Screws.





### **COLLATED EDGE SCREWS (WOOD & COMPOSITE)**

- For use with DRIVE and Edge

   Rake tip augers material out reducing splitting
- 2-% in. (60.3 mm) screw secures 1-1-½ in. (25.4-38.1mm) thick pressure treated, cedar, redwood, uncapped composite, and PVC decking
- Rake tip augers material out reducing splitting and cracking, trimhead reduces visibility
- T-15 Star Drive limits cam-outs



SKU#	DESCRIPTION	ALLOY	SIZE	QTY	DRIVER BIT	CT/MASTER
0395010	Collated Edge Screws	PROTECH	2-¾ in. (60.3mm)	1000	2 - T-15	1
0395020S	for DRIVE	316 Stainless Steel	2-¾ in. (60.3mm)	1000	2 - T-15	1



### COLLATED FACE SCREWS (PRESSURE TREATED)

- For use with DRIVE and Face nose piece (black)
- 3 in. (76.2mm) screw secures pressure treated boards up to 1-½ in. (38.1 mm) thick
- Rake tip augers material out, reducing splitting, and buglehead draws the board tight
- T-20 Star Drive limits cam-outs



SKU#	DESCRIPTION	COLOR	SIZE	QTY	DRIVER BIT	CT/MASTER
0395040		Green	3 in. x #10 (76.2mm)	1000	2 - T-20	1
0395042	Collated Face Screws (Pressure treated) for DRIVE - PROTECH	Tan	3 in. x #10 (76.2mm)	1000	2 - T-20	1
0395047	DRIVE - PROTECH	Red	3 in. x #10 (76.2mm)	1000	2 - T-20	1



### **COLLATED FACE SCREWS (COMPOSITE)**

- For use with DRIVE and Face nose piece (black)
- 2-½ in. (63.5mm) screw secures 1 in. (25.4mm) thick composite and PVC deck boards
- Slash point drives quickly, cutting lead edge creates a flush finish
- T-20 Star Drive limits cam-outs





SKU#	DESCRIPTION	COLOR	SIZE	QTY	DRIVER BIT	CT/MASTER
0395050		Brown	2-½ in. x #10 (63.5mm)	1000	2 - T-20	1
0395060	Collated Face Screws (Composite) for DRIVE - PROTECH	Grey	2-½ in. x #10 (63.5mm)	1000	2 - T-20	1
0395070	DRIVE - PROTECTI	Tan (	2-½ in. x #10 (63.5mm)	1000	2 - T-20	1
0395080	Collated Face Screws (Composite) for DRIVE- 305 Stainless Steel	Bright	2-½ in. x #10 (63.5mm)	1000	2 - T-20	1

# **DRIVE SYSTEM ACCESSORIES**

Driver bits are engineered specifically for use with the CAMO DRIVE and ClipDRIVE tools. The bits engage quickly and easily with the screw heads with reduced cam-outs, and are color-coded with a band for quick identification—orange and yellow for Edge and Clip fastening, black for Face fastening.

### **T-15 BIT**



- For use with CAMO DRIVE for Edge or Clip fastening and the CAMO ClipDRIVE
- 6.25 in. (160mm) long
- T-15 Star Drive



SKU#	DESCRIPTION	QTY	CT./MASTER
0395715	T-15 Bit Replacement	2/pk	4

### **T-20 BIT**



- For use with CAMO DRIVE for Face fastening
- 6.25 in. (160mm) long
- T-20 Star Drive



SKU#	SKU# DESCRIPTION QTY		CT./MASTER
0395720	T-20 Bit Replacement	2/pk	4

### **NOSE PIECES**



- Replacement nose pieces for use with CAMO DRIVE
- Edge (orange) for fastening Collated Edge Screws
- Clip (yellow-banded silver) for fastening Universal Deck Clips
- Face (black) for fastening Collated Composite and Wood Face Screws



SKU#	DESCRIPTION	QTY
0395801	Replacement Edge Nose Piece	1
0395805	Replacement Clip Nose Piece	1
0395803	Replacement Face Nose Piece	1








## **MARKSMAN SYSTEM**

Achieve a fastener-free surface on square decking with this easy and affordable hidden fastening system.

MARKSMAN Tools automatically establish spacing between boards and direct CAMO Edge Screws into the edge of the board, leaving a smooth deck surface. Plus, the MARKSMAN System is backed by a CAMO warranty for use in leading deck boards.



### **HIDDEN FASTENER SYSTEM**

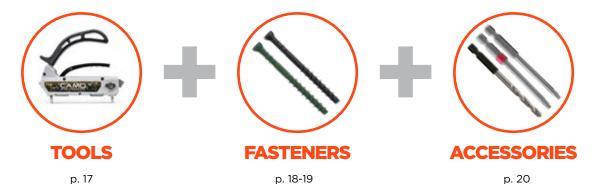

16



### **MARKSMAN PRO®**

- For use with CAMO Edge Screws on square composite, PVC, capped composite, cedar, redwood, hardwood, and KDAT deck boards
- Fits most 5-1/4 in. (133mm) to 5-3/4 in. (146mm) boards
- Creates 3/16 in. (4.7mm) spacing



SKU#	DESCRIPTION	QTY	CT./MASTER	
0345001	MARKSMAN Pro	1	6	



### **MARKSMAN PRO\*-X1**

- For use with CAMO Edge Screws on pressure treated deck boards
- Fits most  $5-\frac{1}{4}$  in. (133mm) to  $5-\frac{3}{4}$  in. (146mm) boards
- Creates 1/16 in. (1.59mm) spacing



SKU#	DESCRIPTION	QTY	CT./MASTER
0345002	MARKSMAN Pro - X1	1	6



### **MARKSMAN PRO\*-NB**

- For use with CAMO Edge Screws on square composite, PVC, capped composite, cedar, redwood, hardwood, and KDAT narrow deck boards
- $\bullet$  Fits most 3-1/4 in. (83mm) to 5 in. (127mm) boards
- Creates 3/16 in. (4.7mm) spacing



SKU#	DESCRIPTION	QTY	CT./MASTER
0345015	MARKSMAN Pro - NB	1	6



### **MARKSMAN® EDGE**

- For use with CAMO Edge Screws on pressure treated deck boards
- Single-shot tool attaches to your drill
- Tool leaves no spacing between boards



SKU#	DESCRIPTION	QTY	CT./MASTER
0345020	MARKSMAN Edge	1	6


# CAMO



# **EDGE SCREWS**

The Best Deck Screws You'll Never See.

CAMO Edge Screws are an innovative, easy-to-install hidden fastener that delivers a high-end look at an affordable price. They are for exclusive use with MARKSMAN Pro tools. Edge Screws feature a patented rake tip that augers material out as you drive to reduce board splitting and a trimhead to reduce visibility and are available in CAMO's proprietary PROTECH coating and 316 Stainless Steel.





### **PROTECH COATED**

PROTECH is our coating that is suitable for use with pressure treated lumber, PVC, composite, and capped composite deck boards in inland environments that face regular exposure to the elements.



### **316 STAINLESS STEEL MARINE GRADE**

316 Stainless Steel is the best fastener for any project and is required for installations in highly corrosive areas like structures that are near saltwater, or that will be exposed to harsh chemicals like chlorine, wood strippers, or ice melt.

DECK BOARD MATERIAL	RECOMMENDED CAMO EDGE SCREW
Pressure Treated Lumber	Stainless Steel or PROTECH Coated
Composite	Stainless Steel or PROTECH Coated
Capped Composite	Stainless Steel or PROTECH Coated (with pre-drilling)
PVC	Stainless Steel or PROTECH Coated
Cedar	Stainless Steel Required
Redwood	Stainless Steel Required
Hardwood or Imported Hardwood	Stainless Steel Required (with pre-drilling)

### **EDGE SCREWS**

- For use with all square deck boards, including, pressure treated, composite, PVC, capped composite, cedar, redwood, and hardwood
- Features a patented rake tip that augers material out as they're driven, reducing the potential for splitting and cracking\*
- T-15 Star Drive offers best connection, reducing cam-outs and stripped screws
- Trimhead reduces visibility on the edge of the board
- Available in PROTECH coating and 316 Stainless Steel





\*Pre-drilling is required for hardwoods and capped composites

### **PROTECH COATED**



SKU#	SIZE	QTY	COVERAGE	DRIVER BIT	CT./MASTER
0345120		100	30 sq. ft. (2.79m²)		12
0345128	1-1/8 in. (47.6mm) x #7	350	100 sq. ft. (9.29m²)	1 - T-15	12
0345124		700	200 sq. ft. (18.58m²)	2 - T-15	4
0345119		1750	500 sq. ft. (46.45m <sup>2</sup> )	2 - T-15	4
0345140		100	30 sq. ft. (2.79m²)		12
0345148	2-¾ in. (60.3mm) x #7	350	100 sq. ft. (9.29m²)	1 - T-15	12
0345144		700	200 sq. ft. (18.58m²)	2 - T-15	4
0345139		1750	500 sq. ft. (46.45m <sup>2</sup> )	2 - T-15	4

### **316 STAINLESS STEEL MARINE GRADE**





SKU#	SIZE	QTY	COVERAGE	DRIVER BIT	CT./MASTER
0345220S	1-% in. (47.6mm) x #7	100	30 sq. ft. (2.79m²)		12
0345228S		350	100 sq. ft. (9.29m²)	1 - T-15	12
0345224S		700	200 sq. ft. (18.58m²)	2 - T-15	4
0345219S		1750	500 sq. ft. (46.45m <sup>2</sup> )	2 - T-15	1
0345240S		100	30 sq. ft. (2.79m²)		12
0345248S	2-¾ in. (60.3mm) x #7	350	100 sq. ft. (9.29m²)	1 - T-15	12
0345244S		700	200 sq. ft. (18.58m²)	2 - T-15	4
0345239S		1750	500 sq. ft. (46.45m²)	2 - T-15	1

# **MARKSMAN ACCESSORIES**

Driver Bits are engineered specifically for use with CAMO Edge Screws and MARKSMAN Pro® tools. The built-in shoulder sets automatic depth of drive for maximum holding power, and prevents over-driving the screw.

# **DRIVER BITS**SQUARE BOARDS



- For use with MARKSMAN Pro® tools and Edge Screws
- 3 in. (76.2 mm) long
- T-15 Star Drive



SKU#	DESCRIPTION	QTY	CT./MASTER
0345099	Driver Bit	2/pk	10

# **DRIVER BITS**GROOVED BOARDS



- For use with MARKSMAN Pro® tools and Edge Screws
- 3 in. (76.2 mm) long
- T-15 Star Drive



SKU#	DESCRIPTION	QTY	CT./MASTER
0345089	Driver Bit for Grooved Board	2/pk	10

### **PRE-DRILL BITS**



- For use with MARKSMAN Pro® tools
- Pre-drilling is required for capped composite and hardwood
- 3-5/8 in. (92mm) long



SKU#	DESCRIPTION	QTY	CT./MASTER
0345035	Pre-Drill Bit	2/pk	10

# MARKSMAN ACCESSORIES



# CAMO



# **LEVER**®

#### **BOARD BENDING AND LOCKING TOOL**

Build a better deck by yourself with LEVER®, the one-turn tool that locks-in rows of boards and clips and straightens warped boards.







- Speeds up grooved deck installs—locks-in rows of boards and clips before fastening
- Strong enough to straighten any warped board
- Easily adjusts to wood and metal joists 1- $\frac{1}{2}$ -3 in. wide for jobsite versatility
- Multi-directional lever locks in one turn



SKU#	DESCRIPTION	QTY	CT./MASTER
0345070	LEVER	1	4





### **LOCKS BOARDS & CLIPS**

Use 2-4 LEVER tools across the length of the deck for the best clip installation experience with consistent spacing.

### **BENDS WARPED BOARDS**

One LEVER is strong enough to straighten out warped pressure treated and hardwood boards in one turn.



### **ANY JOIST MATERIAL**

Works on wood and metal joists



### **ANY JOIST WIDTH**

Adjusts to joists  $1-\frac{1}{2}$  to 3 in. wide



### **ANY BOARD TYPE**

Straightens and locks any board at any angle

**ONE TOOL FOR EVERY JOB** 





## **EXTERIOR SCREWS**

CAMO offers a high-quality line of exterior screws that deliver on reliability no matter the project.

Each screw starts fast, holds strong, and is designed to last. CAMO Deck, Composite, Trim, and Structural Screws are available in our proprietary PROTECH™ coating. We also carry a line of 305 Stainless Steel and Marine Grade 316 Stainless Steel for cedar, redwood, and hardwoods, and agricultural and coastal applications where you need more corrosion resistance. On top of that, we back our exterior fasteners with a CAMO warranty against rust and corrosion so you can confidently use them in all of your decking projects, substructures, landscaping, fences, pole barns, and more.

RECOMMENDED APPLICATIONS FOR EACH SCREW TYPE							
***************************************		<b>6</b> —	<b>6</b> —				
DECK	COMPOSITE	TRIM	STRUCTURAL				
Wood decking projects	Composite decking projects	Wood and PVC Decking	Deck substructure				
• Fences	<ul> <li>PVC decking projects</li> </ul>	Exterior trim	• Deck posts				
Any exterior wood-to-		• Deck rails	• Beams				
wood connection		Balusters	Handrails				
		• Fences	Landscape timbers				

# **DECK SCREWS**

- For any wood-to-wood connection
- Type 17 slash point starts fast
- Buglehead and 2/3 thread design draw the board tight
- Star Drive provides more points of contact, reducing cam-outs

 Available in green and tan PROTECH coating to blend into wood surfaces, and 305 Stainless Steel and 316 Stainless Steel for maximum corrosion resistance

### **PROTECH COATED**

**Deck Screws** 









GREEN SKU#	TAN SKU#	SIZE	QTY	COVERAGE	DRIVER BIT	CT./MASTER
0341070	0356070	1 1/ :- (71 0) #7	100	30 sq. ft. (2.79m²)	1 - T-20	12
0341074	0356074	1-¼ in. (31.8mm) x #7	350	100 sq. ft. (9.29m²)	1 - T-20	4
0341100	0356100		100	30 sq. ft. (2.79m²)	1 - T-20	12
0341104	0356104	1-5% in. (41.3mm) x #8	350	100 sq. ft. (9.29m²)	1 - T-20	4
0341109	0356109		1750	500 sq. ft. (46.45m²)	2 - T-20	1
0341130	0356130		100	30 sq. ft. (2.79m²)	1 - T-20	12
0341134	0356134	2 in. (50.8mm) x #8	350	100 sq. ft. (9.29m²)	1 - T-20	4
0341139	0356139		1750	500 sq. ft. (46.45m²)	2 - T-20	1
0341150	0356150		100	30 sq. ft. (2.79m²)	1 - T-25	12
0341154	0356154	2-½ in. (63.5mm) x #9	350	100 sq. ft. (9.29m²)	1 - T-25	4
0341159	0356159		1750	500 sq. ft. (46.45m²)	2 - T-25	1
0341170	0356170		100	30 sq. ft. (2.79m²)	1 - T-25	12
0341174	0356174	3 in. (76.2mm) x #9	350	100 sq. ft. (9.29m²)	1 - T-25	4
0341179	0356179	_	1750	500 sq. ft. (46.45m²)	2 - T-25	1
0341190	0356190		50	15 sq. ft. (1.39m²)	1 - T-25	12
0341194	0356194	3-½ in. (88.9mm) x #10	250	70 sq. ft. (6.5m²)	1 - T-25	4
0341199	0356199		1350	385 sq. ft. (35.77m²)	2 - T-25	1
0341200	0356200		50	15 sq. ft. (1.39m²)	1 - T-25	12
0341204	0356204	4 in. (101.6mm) x #10	250	70 sq. ft. (6.5m²)	1 - T-25	4
0341209	0356209		1350	385 sq. ft. (35.77m²)	2 - T-25	1

### **305 STAINLESS STEEL**

**Deck Screws** 



### \*New and Available Q2 2022

SKU#	SIZE	QTY		DRIVER BIT	CT./MASTER
0348100*		100	30 sq. ft. (2.79m²)	1 - T-25	12
0348104*	1-% in. (41.3mm) x #8	350	100 sq. ft. (9.29m²)	1 - T-25	4
0348109*		1750	500 sq. ft. (46.45m²)	2 - T-25	1
0348130*		100	30 sq. ft. (2.79m²)	1 - T-25	12
0348134*	2 in. (50.8mm) x #8	350	100 sq. ft. (9.29m²)	1 - T-25	4
0348139*		1750	500 sq. ft. (46.45m²)	2 - T-25	1
0348150		100	30 sq. ft. (2.79m²)	1 - T-25	12
0348154	2-½ in. (63.5mm) x #10	350	100 sq. ft. (9.29m²)	1 - T-25	4
0348159		1750	500 sq. ft. (46.45m <sup>2</sup> )	2 - T-25	1
0348170		100	30 sq. ft. (2.79m²)	1 - T-25	12
0348174	3 in. (76.2mm) x #10	350	100 sq. ft. (9.29m²)	1 - T-25	4
0348179		1750	500 sq. ft. (46.45m²)	2 - T-25	1
0348190*		100	30 sq. ft. (2.79m²)	1 - T-25	12
0348194*	3-½ in. (88.9mm) x #10	350	100 sq. ft. (9.29m²)	1 - T-25	4
0348199*		1750	500 sq. ft. (46.45m²)	2 - T-25	1
0348200*		100	30 sq. ft. (2.79m²)	1 - T-25	12
0348204*	4 in. (101.6mm) x #10	350	100 sq. ft. (9.29m²)	1 - T-25	4
0348209*		1750	500 sq. ft. (46.45m²)	2 - T-25	1

### **316 STAINLESS STEEL MARINE GRADE**

**Deck Screws** 





SKU#	SIZE	QTY	COVERAGE	DRIVER BIT	CT./MASTER
0348100S	1.5/ in (41.7mm) v #0	100	30 sq. ft. (2.79m²)	1 - T-25	12
0348104S	1-% in. (41.3mm) x #9	350	100 sq. ft. (9.29m²)	1 - T-25	4
0348130S		100	30 sq. ft. (2.79m²)	1 - T-25	12
0348134\$	2 in. (50.8mm) x #9	350	100 sq. ft. (9.29m²)	1 - T-25	4
0348139S		1750	500 sq. ft. (46.45m²)	2 - T-25	1
0348150S		100	30 sq. ft. (2.79m²)	1 - T-25	12
0348154S	2-½ in. (63.5mm) x #10	350	100 sq. ft. (9.29m²)	1 - T-25	4
0348159S		1750	500 sq. ft. (46.45m <sup>2</sup> )	2 - T-25	1
0348170S		100	30 sq. ft. (2.79m²)	1 - T-25	12
0348174S	3 in. (76.2mm) x #10	350	100 sq. ft. (9.29m²)	1 - T-25	4
0348179S		1750	500 sq. ft. (46.45m <sup>2</sup> )	2 - T-25	1
0348190S		50	15 sq. ft. (1.39m²)	1 - T-25	12
0348194S	3-½ in. (88.9mm) x #10	250	70 sq. ft. (6.5m²)	1 - T-25	4
0348199S		1350	385 sq. ft. (35.77m²)	2 - T-25	1

# **COMPOSITE SCREWS**

- Color-matched screws for composite and PVC decking projects
- Type 99 double slash point augers board material out for fast driving
- Trilobular shank reduces torque and prevents mushrooming

- Reverse thread at top increases pull-down power while cutting lead edge creates a flush finish
- T-20 Star Drive provides more points of contact, reducing cam-outs and limiting bit wear
- Available in PROTECH coating and 316 Stainless Steel for maximum corrosion resistance



### **COLOR MATCHER**

Our Composite screws are available in painted finishes to match popular deck boards. Use the color matcher on camofasteners.com to find the right color for your board.

### **PROTECH COATED**

**Composite Screws** 







SKU#	SIZE	QTY	COVERAGE	DRIVER BIT	CT./MASTER	COLOR
0349250		100	30 sq. ft. (2.79m²)	1 - T-20	12	
0349254	2-½ in. (63.5mm) x #10	350	100 sq. ft. (9.29m²)	1 - T-20	4	Brown
0349259		1750	500 sq. ft. (46.45m <sup>2</sup> )	2 - T-20	1	
0349350		100	30 sq. ft. (2.79m²)	1 - T-20	12	
0349354	2-½ in. (63.5mm) x #10	350	100 sq. ft. (9.29m²)	1 - T-20	4	Cedar
0349359		1750	500 sq. ft. (46.45m²)	2 - T-20	1	
0349050		100	30 sq. ft. (2.79m²)	1 - T-20	12	<b>利度制度整数</b>
0349054	2-½ in. (63.5mm) x #10	350	100 sq. ft. (9.29m²)	1 - T-20	4	Dark Brown
0349059		1750	500 sq. ft. (46.45m²)	2 - T-20	1	

### **PROTECH COATED**

**Composite Screws** 



SKU#	SIZE	QTY	COVERAGE	DRIVER BIT	CT./MASTER	COL	.OR
0349450		100	30 sq. ft. (2.79m²)	1 - T-20	12		1 2 2 1
0349454	2-½ in. (63.5mm) x #10	350	100 sq. ft. (9.29m²)	1 - T-20	4	Grey	0
0349459		1750	500 sq. ft. (46.45m²)	2 - T-20	1		1/11
0349550		100	30 sq. ft. (2.79m²)	1 - T-20	12		
0349554	2-½ in. (63.5mm) x #10	350	100 sq. ft. (9.29m²)	1 - T-20	4	Redwood	101
0349559		1750	500 sq. ft. (46.45m²)	2 - T-20	1		1 PM
0349750		100	30 sq. ft. (2.79m²)	1 - T-20	12		
0349754	2-½ in. (63.5mm) x #10	350	100 sq. ft. (9.29m²)	1 - T-20	4	Sand	•
0349759		1750	500 sq. ft. (46.45m²)	2 - T-20	1		
0349950		100	30 sq. ft. (2.79m²)	1 - T-20	12		
0349954	2-½ in. (63.5mm) x #10	350	100 sq. ft. (9.29m²)	1 - T-20	4	Stone Grey	(3)
0349959		1750	500 sq. ft. (46.45m²)	2 - T-20	1		
0349150		100	30 sq. ft. (2.79m²)	1 - T-20	12		
0349154	2-½ in. (63.5mm) x #10	350	100 sq. ft. (9.29m²)	1 - T-20	4	Tan	
0349159		1750	500 sq. ft. (46.45m²)	2 - T-20	1		
0349850		100	30 sq. ft. (2.79m²)	1 - T-20	12		
0349854	2-½ in. (63.5mm) x #10	350	100 sq. ft. (9.29m²)	1 - T-20	4	Winchester	
0349859		1750	500 sq. ft. (46.45m²)	2 - T-20	1		
0349000G		100	30 sq. ft. (2.79m²)	1 - T-20	12		
0349004G	2-½ in. (63.5mm) x #10	350	100 sq. ft. (9.29m²)	1 - T-20	4	Dark Grey	(2)
0349009G		1750	500 sq. ft. (46.45m²)	2 - T-20	1		The state of

### **316 STAINLESS STEEL MARINE GRADE**

**Composite Screws** 





SKU#	SIZE	QTY	COVERAGE	DRIVER BIT	CT./MASTER	COLOR	
0367158BS	2.1/:- (67.5) #10	350	100 sq. ft. (9.29m²)	1 - T-20	4	D	9
0367159BS	2-½ in. (63.5mm) x #10	1750	500 sq. ft. (46.45m²)	2 - T-20	1	Brown	
0367158CS	0.1/ '- (67.5 ) #10	350	100 sq. ft. (9.29m²)	1 - T-20	4		
0367159CS	2-½ in. (63.5mm) x #10	1750	500 sq. ft. (46.45m²)	2 - T-20	1	Cedar	
0367158ES	0.1/: (07.5 ) (110	350	100 sq. ft. (9.29m²)	1 - T-20	4		
0367159ES	2-½ in. (63.5mm) x #10	1750	500 sq. ft. (46.45m²)	2 - T-20	1	Grey	
0367158DS		350	100 sq. ft. (9.29m²)	1 - T-20	4	Dark	
0367159DS	2-½ in. (63.5mm) x #10	1750	500 sq. ft. (46.45m²)	2 - T-20	1	Brown	
						340	
0367158NS	0.1/: (07.5 ) (110	350	100 sq. ft. (9.29m²)	1 - T-20	4		6
0367159NS	2-½ in. (63.5mm) x #10	1750	500 sq. ft. (46.45m²)	2 - T-20	1	Stone Grey	
0367158RS	0.1/ '- (67.5 ) #10	350	100 sq. ft. (9.29m²)	1 - T-20	4	D. J. J. J.	
0367159RS	2-½ in. (63.5mm) x #10	1750	500 sq. ft. (46.45m²)	2 - T-20	1	Redwood	
0367158SS	2.1/:- (67.5) #10	350	100 sq. ft. (9.29m²)	1 - T-20	4	Canal	
0367159SS	2-½ in. (63.5mm) x #10	1750	500 sq. ft. (46.45m²)	2 - T-20	1	Sand	O
0367158TS	2.1/ in (67.5) #10	350	100 sq. ft. (9.29m²)	1 - T-20	4	Tan	
0367159TS	2-½ in. (63.5mm) x #10	1750	500 sq. ft. (46.45m²)	2 - T-20	1	Tan	
0367158WS	2.1/ in (67 Frame) - #12	350	100 sq. ft. (9.29m²)	1 - T-20	4	NA/in ala antau	0
0367159WS	2-½ in. (63.5mm) x #10	1750	500 sq. ft. (46.45m²)	2 - T-20	1	Winchester	

# **TRIM SCREWS**

- For exterior deck, trim, and finish applications with wood and PVC
- Type 17 slash point starts fast with no pre-drilling
- Trimhead screw reduces visibility in finish projects
- T-15 Star Drive provides more points of contact, reducing cam-outs and limiting bit wear

 Available in green PROTECH coating to blend into wood surfaces, bright 305 and 316 Stainless Steel, and painted 316 Stainless Steel

### **PROTECH COATED**

**Trim Screws** 







SKU#	SIZE	QTY	DRIVER BIT	CT./MASTER	HEAD
0346100	1-5⁄8 in. (41.3mm) x #7	100	1 - T-15	12	
0346104	1-78 III. (41.311IIII) X #7	350	1 - T-15	4	
0346130	2 in. (50.8mm) x #7	100	1 - T-15	12	
0346134	2 111. (50.611111) x #7	350	1 - T-15	4	
0346150	2-½ in. (63.5mm) x #7	100	1 - T-15	12	
0346154	2-72 III. (63.5IIIIII) X #7	350	1 - T-15	4	
0346170	7: (70.0 ) #7	100	1 - T-15	12	
0346174	3 in. (76.2mm) x #7	350	1 - T-15	4	
0346190	7 1/ in (00 0mm) v #0	100	1 - T-15	12	
0346194	3-½ in. (88.9mm) x #8	350	1 - T-15	4	

### **305 STAINLESS STEEL**

**Trim Screws** 



### \*New and Available Q2 2022

SKU#	SIZE	QTY	DRIVER BIT	CT./MASTER
0350100*	15/ 10 (417000) 0 #0	100	1 - T-15	12
0350104*	1-% in. (41.3mm) x #8	350	1 - T-15	4
0350130*	2 in (FO 0mm) v #0	100	1 - T-15	12
0350134*	2 in. (50.8mm) x #8	350	1 - T-15	4
0350150*	2.1/ in (67 Fram) v #0	100	1 - T-15	12
0350154*	2-½ in. (63.5mm) x #8	350	1 - T-15	4
0350170*	7 in (76 2mm) v #0	100	1 - T-15	12
0350174*	3 in. (76.2mm) x #8	350	1 - T-15	4

### **316 STAINLESS STEEL MARINE GRADE**

**Trim Screws** 





SKU#	SIZE	QTY	DRIVER BIT	CT./MASTER	HEAD
0350100S	1.5/ in (41.7mm) v #0	100	1 - T-15	12	
0350104S	1-% in (41.3mm) x #8	350	1 - T-15	4	
0350130S	2 in (E0.9mm) v #9	100	1 - T-15	12	
0350134S	2 in. (50.8mm) x #8	350	1 - T-15	4	
0350150S	2.1/ in (67 Fram) v #0	100	1 - T-15	12	
0350154S	2-½ in. (63.5mm) x #8	350	1 - T-15	4	
0350170S	3 in. (76.2mm) x #8	100	1 - T-15	12	
0350174S	3 III. (76.2IIIII) x #8	350	1 - T-15	4	
0350190S	7 1/ in (99 0mm) v #9	100	1 - T-15	12	
0350194S	3-½ in. (88.9mm) x #8	350	1 - T-15	4	

### **316 STAINLESS STEEL MARINE GRADE - PAINTED**

**Trim Screws** 





### **COLOR MATCHER**

Our Stainless Steel Trim screws are available in painted finishes to match popular deck boards.

Use the color matcher on camofasteners.com to find the right color for your board.  $\label{eq:color_state}$ 



SKU#	SIZE	QTY	DRIVER BIT	CT./MASTER	COI	LOR
0353000ES		100	1 - T-15	12		
0353004ES	1-5% in. (41.3mm) x #8	350	1 - T-15	4		
0353009ES		1750	2 - T-15	1	<u></u>	22
0353050ES		100	1 - T-15	12	Grey	20
0353054ES	2-½ in. (63.5mm) x #8	350	1 - T-15	4		
0353059ES		1750	2 - T-15	1		
075700000		100	1 7 15	12		
0353000RS	1.5/ in (41.7mm) v #0	100	1 - T-15	4		
0353004RS	1-% in. (41.3mm) x #8	350	1 - T-15			
0353009RS		1750	2 - T-15	1	Redwood	₹\$.
0353050RS	2.1/ in (67 Fram) v #0	100	1 - T-15	12		
0353054RS	2-½ in. (63.5mm) x #8	350	1 - T-15	•		
0353059RS		1750	2 - T-15	1		
0353000WS		100	1 - T-15	12		
0353004WS	1-5% in. (41.3mm) x #8	350	1 - T-15	4		
0353009WS		1750	2 - T-15	1	)	22
0353050WS		100	1 - T-15	12	Winchester	Sec.
0353054WS	2-½ in. (63.5mm) x #8	350	1 - T-15	4		
0353059WS		1750	2 - T-15	1		
0757000NC		100	1 715	10		
0353000NS	15/: (417) #0	100	1 - T-15	12		
0353004NS	1-% in. (41.3mm) x #8	350	1 - T-15	4		
0353009NS		1750	2 - T-15	1	Stone Grey	33.
0353050NS	2.1/ : (67.5) #0	100	1 - T-15	12		
0353054NS	2-½ in. (63.5mm) x #8	350 1750	1 - T-15	1		
0353059NS		1/50	2 - T-15			
0353000GS		100	1 - T-15	12		
0353004GS	1-5% in. (41.3mm) x #8	350	1 - T-15	4		
0353009GS		1750	2 - T-15	1	Dark Grey	28
0353050GS		100	1 - T-15	12	Dark Orey	200
0353054GS	2-½ in. (63.5mm) x #8	350	1 - T-15	4		
0353059GS		1750	2 - T-15	1		

### **316 STAINLESS STEEL MARINE GRADE - PAINTED**

**Trim Screws** 



SKU#	SIZE	QTY	DRIVER BIT	CT./MASTER	col	.OR
0353000SS		100	1 - T-15	12		
0353004SS	1-5% in. (41.3mm) x #8	350	1 - T-15	4		
0353009SS		1750	2 - T-15	1	]	2.2
0353050SS		100	1 - T-15	12	Sand	SIL
0353054SS	2-½ in. (63.5mm) x #8	350	1 - T-15	4		
0353059SS		1750	2 - T-15	1		
075700000		100	1 7 15	10		
0353000DS	1.5/ in (41.7mm) v #0	100	1 - T-15	12		
0353004DS	1-% in. (41.3mm) x #8	350	1 - T-15			
0353009DS		1750	2 - T-15	1 12	Dark Brown	
0353050DS	2.1/ in (67 Fram) v #0	100	1 - T-15	4	_	
0353054DS	2-½ in. (63.5mm) x #8	350	1 - T-15			
0353059DS		1750	2 - T-15	1		
0353000CS		100	1 - T-15	12		
0353004CS	1-5/8 in. (41.3mm) x #8	350	1 - T-15	4		
0353009CS		1750	2 - T-15	1	Ceder	22
0353050CS		100	1 - T-15	12	Ceder	200
0353054CS	2-½ in. (63.5mm) x #8	350	1 - T-15	4		
0353059CS		1750	2 - T-15	1		
0353100S		100	1 - T-15	12		
0353104\$	1-5% in. (41.3mm) x #8	350	1 - T-15	4		
0353109S		1750	2 - T-15	1		(4)
0353150S		100	1 - T-15	12	White	<b>43.</b>
0353154S	2-½ in. (63.5mm) x #8	350	1 - T-15	4		
0353159S		1750	2 - T-15	1		
0353000BS		100	1 - T-15	12		
0353004BS	1-5% in. (41.3mm) x #8	350	1 - T-15	4		
0353009BS		1750	2 - T-15	1	Brown	26
0353050BS		100	1 - T-15	12		
0353054BS	0 1/ in /C7 Engage 1 40	350	1 - T-15	4		
	2-½ in. (63.5mm) x #8				1	
0353054BS	2-1/2 In. (63.5mm) X #8	1750	2 - T-15	1		
	2-½ In. (63.5mm) X #8		2 - T-15	1 12		
0353059BS 0353000TS	2-½ in. (63.5mm) x #8	1750	1 - T-15			
0353059BS 0353000TS 0353004TS		1750 100 350	1 - T-15 1 - T-15	12		
0353059BS 0353000TS 0353004TS 0353009TS		1750	1 - T-15	12 4	Tan	₩.
0353059BS 0353000TS 0353004TS		1750 100 350 1750	1 - T-15 1 - T-15 2 - T-15	12 4 1	Tan	₹ <b>2</b> .

# **STRUCTURAL SCREWS**

### **MULTI-PURPOSE SCREWS**



- 1/4 in. (6.35mm) structural screw for deck substructure, deck posts, beams, handrails, landscape timbers, and more
- Sharp point starts fast with no pre-drilling
- Flat head finishes flush and holds strong
- Star Drive provides more points of contact, reducing cam-outs and limiting bit wear
- 3rd party tested screws feature PROTECH green coating





SKU#	SIZE	QTY	DRIVER BIT	CT./MASTER
0347150		10	1 - T-30	10
0347154	2-½ in. (63.5mm) x 1/4 in. (6.35mm)	50	1 - T-30	4
0347159		500	2 - T-30	1
0347170	3 in. (76.2mm)x 1/4 in. (6.35mm)	10	1 - T-30	10
0347174		50	1 - T-30	4
0347179		500	2 - T-30	1
0347190	3-½ in. (88.9mm) x 1/4 in. (6.35mm)	10	1 - T-30	10
0347194		50	1 - T-30	4
0347199		500	2 - T-30	1
0347200	4 in. (101.6mm) x 1/4 in. (6.35mm)	10	1 - T-40	10
0347204		50	1 - T-40	4
0347209		250	2 - T-40	1
0347220	5 in. (127mm) x 1/4 in. (6.35mm)	10	1 - T-40	10
0347224		50	1 - T-40	4
0347229		250	2 - T-40	1
0347240	6 in. (152.4mm) x 1/4 in. (6.35mm)	10	1 - T-40	10
0347244		50	1 - T-40	4
0347249		250	2 - T-40	1
0347260	8 in. (203.2mm) x 1/4 in. (6.35mm)	10	1 - T-40	10
0347269	6 III. (203.211III) X 1/4 III. (6.3311III)	250	2 - T-40	1
0347270	10 in. (254mm) x 1/4 in. (6.35mm)	10	1 - T-40	10
0347279	10 III. (25411111) X 1/4 III. (0.5511111)	250	2 - T-40	1



#### STRENGTH TEST DATA

Our Structural Screws have been 3rd party tested for screw strength. Find the test data on camofasteners.com

# HEAVY DUTY MULTI-PURPOSE SCREWS



- 5/16 in. (7.9mm) structural screw for deck substructure, deck posts, beams, handrails, landscape timbers, and more
- Sharp point starts fast with no pre-drilling
- Flat head finishes flush and holds strong
- Star Drive provides more points of contact, reducing cam-outs and limiting bit wear
- 3rd party tested screws feature PROTECH green coating





SKU#	SIZE	QTY	DRIVER BIT	CT./MASTER
0347490	7.5/ in (02mm) v.E/10 in (70mm)	10	1 - T-40	10
0347494	- 3-% in. (92mm) x 5/16 in. (7.9mm)	50	1 - T-40	4
0347500		10	1 - T-40	10
0347504	4 in. (101.6mm) x 5/16 in. (7.9mm)	50	1 - T-40	4
0347509		250	2 - T-40	1
0347520	5 in. (127mm) x 5/16 in. (7.9mm)	10	1 - T-40	10
0347524	5 III. (127111111) x 5/16 III. (7.9111111)	50	1 - T-40	4
0347540		10	1 - T-40	10
0347544	6 in. (152.4mm) x 5/16 in. (7.9mm)	50	1 - T-40	4
0347549		250	2 - T-40	1
0347560	9 in (207 2mm) v E/16 in (70mm)	10	1 - T-40	10
0347569	8 in. (203.2mm) x 5/16 in. (7.9mm)	250	2 - T-40	1

# **EXTERIOR ACCESSORIES**

### **POWER BITS**



T-40


- Power bits come in each pail of exterior screws for convenience on the jobsite
- 2 in. (50.8mm) long
- Premium Star Drive power bit allows for better connections





SKU#	DESCRIPTION	QTY	CT./MASTER
0333900	T-15 Star Drive Power Bit	3	10
0333910	T-20 Star Drive Power Bit	3	10
0333920	T-25 Star Drive Power Bit	3	10
0333990	T-30 Star Drive Power Bit	3	10
0333930	T-40 Star Drive Power Bit	3	10



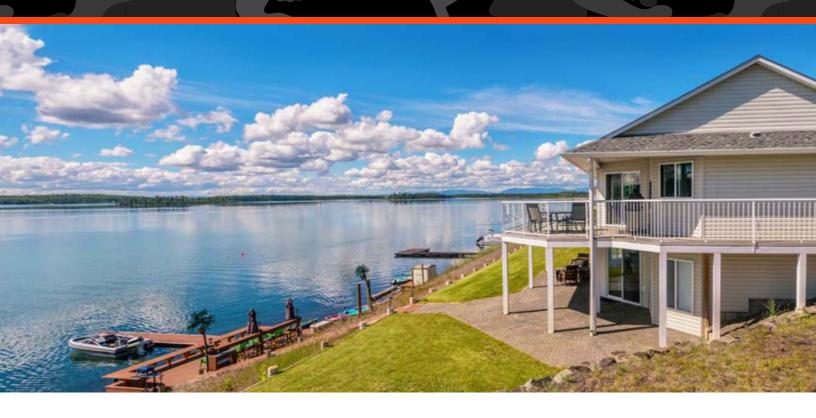


# STAINLESS STEEL FASTENERS

CAMO offers a comprehensive line of Stainless Steel screws and nails to help you build a better deck in corrosive environments. Our 305 Stainless Steel screws deliver an aesthetic finish and hold up in your connections, while 316 Marine Grade Stainless Steel fasteners offer ultimate protection against corrosion in coastal and agricultural environments.

### CORROSION RESISTANCE METER

While our PROTECH coating offers good resistance against mild corrosion, 305 and 316 Stainless Steel are the best alloys to build with in corrosive areas.



## **305 STAINLESS STEEL**

- Exterior structures outside of 3,000 ft. from a saltwater shoreline
- Installations of pressure treated, PVC, composite, and capped composite boards
- Any outdoor project that you want to protect against potential corrosion

# **316 STAINLESS STEEL**

- Coastal, marine, or waterway areas within 3,000 ft of saltwater
- Structures exposed to chlorine, wood strippers, or ice-melting chemicals
- Agricultural environments that deal with chemicals, pesticides, and treatments
- Installations of cedar, redwood, or hardwood decking where tannin release caused by carbon fasteners may cause staining

### **RECOMMENDED APPLICATIONS FOR EACH FASTENER:**

### **DECK**



- Wood decking projects
- Fences
- Any exterior wood-to-wood connection

### COMPOSITE



- Composite decking projects
- PVC decking projects

#### **EDGE**



• Fasten any square deck board through the edge of the board using the MARKŠMAN Pro tools

#### TRIM



- Decking
- Exterior trim
- Deck rails
- Balusters
- Fences

### **HAND DRIVE NAILS**



- Decking
- Wood-to-wood connections
- Joist hangers

### **COLLATED NAILS**



- Framing
- General construction
- Decks and fences
- Metal joist hangers

### **DECK SCREWS**

- For fastening wood decking and other wood-to-wood connections in corrosive environments
- Type 17 slash point starts fast with no pre-drilling, reducing drive time
- Buglehead draws board tight, increasing pull-down strength
- 2/3 thread design offers premium holding power
- T-25 Star Drive provides more points of contact, reducing cam-outs and limiting bit wear
- Available in 305 Stainless Steel and 316 Stainless Steel

### **305 STAINLESS STEEL**

**Deck Screws** 



SKU#	SIZE	QTY		DRIVER BIT	CT./MASTER
0348100*		100	30 sq. ft. (2.79m²)	1 - T-25	12
0348104*	1-5% in. (41.3mm) x #8	350	100 sq. ft. (9.29m²)	1 - T-25	4
0348109*		1750	500 sq. ft. (46.45m <sup>2</sup> )	2 - T-25	1
0348130*		100	30 sq. ft. (2.79m²)	1 - T-25	12
0348134*	2 in. (50.8mm) x #8	350	100 sq. ft. (9.29m²)	1 - T-25	4
0348139*		1750	500 sq. ft. (46.45m²)	2 - T-25	1
0348150		100	30 sq. ft. (2.79m²)	1 - T-25	12
0348154	2-½ in. (63.5mm) x #10	350	100 sq. ft. (9.29m²)	1 - T-25	4
0348159		1750	500 sq. ft. (46.45m²)	2 - T-25	1
0348170		100	30 sq. ft. (2.79m²)	1 - T-25	12
0348174	3 in. (76.2mm) x #10	350	100 sq. ft. (9.29m²)	1 - T-25	4
0348179		1750	500 sq. ft. (46.45m²)	2 - T-25	1
0348190*		100	30 sq. ft. (2.79m²)	1 - T-25	12
0348194*	3-½ in. (88.9mm) x #10	350	100 sq. ft. (9.29m²)	1 - T-25	4
0348199*		1750	500 sq. ft. (46.45m²)	2 - T-25	1
0348200*		100	30 sq. ft. (2.79m²)	1 - T-25	12
0348204*	4 in. (101.6mm) x #10	350	100 sq. ft. (9.29m²)	1 - T-25	4
0348209*		1750	500 sq. ft. (46.45m²)	2 - T-25	1

\*New and Available Q2 2022

### **316 STAINLESS STEEL MARINE GRADE**

**Deck Screws** 





SKU#	SIZE	QTY	COVERAGE	DRIVER BIT	CT./MASTER
0348100S	1.5/ in (41.7mm) v #0	100	30 sq. ft. (2.79m²)	1 - T-25	12
0348104S	1-% in. (41.3mm) x #9	350	100 sq. ft. (9.29m²)	1 - T-25	4
0348130S		100	30 sq. ft. (2.79m²)	1 - T-25	12
0348134S	2 in. (50.8mm) x #9	350	100 sq. ft. (9.29m²)	1 - T-25	4
0348139S		1750	500 sq. ft. (46.45m²)	2 - T-25	1
0348150S		100	30 sq. ft. (2.79m²)	1 - T-25	12
0348154S	2-½ in. (63.5mm) x #10	350	100 sq. ft. (9.29m²)	1 - T-25	4
0348159S		1750	500 sq. ft. (46.45m²)	2 - T-25	1
0348170S		100	30 sq. ft. (2.79m²)	1 - T-25	12
0348174S	3 in. (76.2mm) x #10	350	100 sq. ft. (9.29m²)	1 - T-25	4
0348179S		1750	500 sq. ft. (46.45m²)	2 - T-25	1
0348190S		100	30 sq. ft. (2.79m²)	1 - T-25	12
0348194S	3-½ in. (88.9mm) x #10	350	100 sq. ft. (9.29m²)	1 - T-25	4
0348199S		1750	500 sq. ft. (46.45m <sup>2</sup> )	2 - T-25	1

### **COMPOSITE SCREWS**

- Color-matched screws for securing composite and PVC decking in highly corrosive environments
- Type 99 double slash point augers board material out for fast driving
- Trilobular shank reduces torque and prevents mushrooming
- Reverse thread at top increases pull-down power
- · Cutting lead edge creates a flush finish
- T-20 Star Drive provides more points of contact, reducing cam-outs and limiting bit wear



### **COLOR MATCHER**

Our Composite screws are available in painted finishes to match popular deck boards.

Use the color matcher on camofasteners.com to find the right color for your board.

### **316 STAINLESS STEEL MARINE GRADE**

**Composite Screws** 





SKU#	SIZE	QTY	COVERAGE	DRIVER BIT	CT./MASTER	COLOR	ž .
0367158BS	2.1/ in (67 Emm) v #10	350	100 sq. ft. (9.29m²)	1 - T-20	4	Brown	0
0367159BS	2-½ in. (63.5mm) x #10	1750	500 sq. ft. (46.45m²)	2 - T-20	1	DIOWII	
0367158CS	2.1/ in (67 Emm) v #10	350	100 sq. ft. (9.29m²)	1 - T-20	4	Cedar	
0367159CS	2-½ in. (63.5mm) x #10	1750	500 sq. ft. (46.45m²)	2 - T-20	1	Cedar	$\Theta$
0367158ES	2-½ in. (63.5mm) x #10	350	100 sq. ft. (9.29m²)	1 - T-20	4	Grey	6
0367159ES	2-72 III. (63.5IIIIII) X #10	1750	500 sq. ft. (46.45m²)	2 - T-20	1	Grey	9
0367158DS	2-½ in. (63.5mm) x #10	350	100 sq. ft. (9.29m²)	1 - T-20	4	Dark	
0367159DS	2-72 III. (03.3HIIII) X #10	1750	500 sq. ft. (46.45m²)	2 - T-20	1	Brown	

SKU#	SIZE	QTY	COVERAGE	DRIVER BIT	CT./MASTER	COLOR
0367158NS	2.1/ in (67 Enems) v #10	350	100 sq. ft. (9.29m²)	1 - T-20	4	Stone Grey
0367159NS	2-½ in. (63.5mm) x #10	1750	500 sq. ft. (46.45m²)	2 - T-20	1	Stone Grey
0367158RS	2.1/ in (67 Emans) v #10	350	100 sq. ft. (9.29m²)	1 - T-20	4	Redwood
0367159RS	2-½ in. (63.5mm) x #10	1750	500 sq. ft. (46.45m²)	2 - T-20	1	Redwood
0367158SS	2.1/ in (67 Emans) v #10	350	100 sq. ft. (9.29m²)	1 - T-20	4	Cand
0367159SS	2-½ in. (63.5mm) x #10	1750	500 sq. ft. (46.45m²)	2 - T-20	1	Sand
0367158TS	2.1/ :- (67.5) #10	350	100 sq. ft. (9.29m²)	1 - T-20	4	T
0367159TS	2-½ in. (63.5mm) x #10	1750	500 sq. ft. (46.45m²)	2 - T-20	1	Tan
0367158WS	2.1/ in (67 Emans) v #10	350	100 sq. ft. (9.29m²)	1 - T-20	4	Win shorter
0367159WS	2-½ in. (63.5mm) x #10	1750	500 sq. ft. (46.45m²)	2 - T-20	1	Winchester

### **305 STAINLESS STEEL**

**Bright Collated Face Screws for Composite** 

• For exclusive use with the CAMO **DRIVE**\* Tool





SKU#	SIZE	QTY	DRIVER BIT	CT./MASTER
0395080	2-½ in. (63.5mm) x #10	1000	2 - T-20	1

### **EDGE SCREWS**

- Fastens all square deck boards: pressure treated, composite, PVC, capped composite, cedar, redwood, and hardwood
- Patented rake tip augers material out as they're driven, reducing the potential for splitting and cracking\*
- Trimhead reduces visibility on the edge of the board
- T-15 Star Drive offers best connection, reducing cam-outs and stripped screws

\*Pre-drilling is required for hardwoods and capped composites

### **316 STAINLESS STEEL MARINE GRADE**

**Edge Screws** 

• For exclusive use with CAMO MARKSMAN Pro\* Tools





SKU#	SIZE	QTY	COVERAGE	DRIVER BIT	CT./MASTER
0345220S		100	30 sq. ft. (2.79m²)		12
0345228S	1 7/ : /47 (	350	100 sq. ft. (9.29m²)	1 - T-15	12
0345224S	1-% in. (47.6mm) x #7	700	200 sq. ft. (18.58m²)	2 - T-15	4
0345219S		1750	500 sq. ft. (46.45m <sup>2</sup> )	2 - T-15	1
0345240S		100	30 sq. ft. (2.79m²)		12
0345248S	0.7/: /00.7	350	100 sq. ft. (9.29m²)	1 - T-15	12
0345244S	2-3/8 in. (60.3mm) x #7	700	200 sq. ft. (18.58m²)	2 - T-15	4
0345239S		1750	500 sq. ft. (46.45m²)	2 - T-15	1

### **316 STAINLESS STEEL MARINE GRADE**

**Collated Edge Screws** 

• For exclusive use with the CAMO **DRIVE**\* Tool







SKU#	SIZE	QTY	COVERAGE	DRIVER BIT	CT./MASTER
0395020S	2-3/8 in. (60.3mm) x #7	1000	285 sq. ft. (26.5m <sup>2</sup> )	2 - T-15	1

### **TRIM SCREWS**

- For fastening wood and PVC deck trim and finish applications in corrosive environments
- Type 17 slash point starts fast with no pre-drilling
- Trimhead screw reduces visibility in finish projects
- T-15 Star Drive provides more points of contact, reducing cam-outs and limiting bit wear
- Available in Bright 305 Stainless Steel, Bright 316 Stainless Steel, and Painted 316 Stainless Steel

### **305 STAINLESS STEEL**

**Trim Screws** 



### \*New and Available Q2 2022

SKU#	SIZE	QTY	DRIVER BIT	CT./MASTER
0350100*	1.5/ :- (41.7) #0	100	1 - T-15	12
0350104*	1-% in. (41.3mm) x #8	350	1 - T-15	4
0350130*	2 :- (50 0) #0	100	1 - T-15	12
0350134*	2 in. (50.8mm) x #8	350	1 - T-15	4
0350150*	2.1/ :- (67.5) #0	100	1 - T-15	12
0350154*	2-½ in. (63.5mm) x #8	350	1 - T-15	4
0350170*	7 in (76 2mm) v #0	100	1 - T-15	12
0350174*	3 in. (76.2mm) x #8	350	1 - T-15	4

### **316 STAINLESS STEEL MARINE GRADE**

**Trim Screws** 





SKU#	SIZE	QTY	DRIVER BIT	CT./MASTER	HEAD
0350100S	15/: /417	100	1 - T-15	12	
0350104S	1-% in. (41.3mm) x #8	350	1 - T-15	4	
0350130S	0: (500 ) 110	100	1 - T-15	12	
0350134S	2 in. (50.8mm) x #8	350	1 - T-15	4	
0350150S	0.1/: /07.5	100	1 - T-15	12	52
0350154S	2-½ in. (63.5mm) x #8	350	1 - T-15	4	
0350170S	7 :- (70 2) #0	100	1 - T-15	12	
0350174S	3 in. (76.2mm) x #8	350	1 - T-15	4	
0350190S	3-½ in. (88.9mm) x #8	100	1 - T-15	12	
03501945	3-72 III. (00.9IIIII) X #8	350	1 - T-15	4	

### **316 STAINLESS STEEL MARINE GRADE - PAINTED**

**Trim Screws** 





### **COLOR MATCHER**

Our Stainless Steel Trim screws are available in painted finishes to match popular deck boards.

Use the color matcher on camofasteners.com to find the right color for your board.  $\label{eq:color_state}$ 



SKU#	SIZE	QTY	DRIVER BIT	CT./MASTER	CO	LOR
0353000ES		100	1 - T-15	12		
0353004ES	1-5% in. (41.3mm) x #8	350	1 - T-15	4		-
0353009ES		1750	2 - T-15	1		
0353050ES		100	1 - T-15	12	Grey	200
0353054ES	2-½ in. (63.5mm) x #8	350	1 - T-15	4		
0353059ES		1750	2 - T-15	1		
075700000		100	1 715	12		
0353000RS	1 5/ 1 (41 7) #0	100	1 - T-15	12		
0353004RS	1-% in. (41.3mm) x #8	350	1 - T-15	4		
0353009RS		1750	2 - T-15	1	Redwood	23.
0353050RS	0.1/ :. (67.5) #0	100	1 - T-15	12		
0353054RS	2-½ in. (63.5mm) x #8	350	1 - T-15	4		
0353059RS		1750	2 - T-15	1		
0353000WS		100	1 - T-15	12		<b>(4)</b>
0353004WS	1-5% in. (41.3mm) x #8	350	1 - T-15	4		
0353009WS		1750	2 - T-15	1		
0353050WS		100	1 - T-15	12	Winchester	
0353054WS	2-½ in. (63.5mm) x #8	350	1 - T-15	4		
0353059WS		1750	2 - T-15	1		
0757000NC		100	1 - T-15	12		
0353000NS	1 5/ in //1 7mm) v #0					
0353004NS	1-% in. (41.3mm) x #8	350	1 - T-15	4		
0353009NS		1750 100	2 - T-15 1 - T-15	1 12	Stone Grey	\$\$.
0353050NS 0353054NS	2-1/2 in (63 5mm) v #9	350	1 - 1-15 1 - T-15	4		
0353054NS 0353059NS	2-½ in. (63.5mm) x #8	1750	2 - T-15	1		
0333039113		1/30	Z - 1-13			
0353000GS		100	1 - T-15	12	Dark Grey	
0353004GS	1-% in. (41.3mm) x #8	350	1 - T-15	4		
0353009GS		1750	2 - T-15	1		23
0353050GS		100	1 - T-15	12		-
0353054GS	2-½ in. (63.5mm) x #8	350	1 - T-15	4		
0353059GS		1750	2 - T-15	1		

SKU#	SIZE	QTY	DRIVER BIT	CT./MASTER	col	LOR
0353000SS		100	1 - T-15	12		
0353004SS	1-% in. (41.3mm) x #8	350	1 - T-15	4		
0353009SS		1750	2 - T-15	1	6	22
0353050SS		100	1 - T-15	12	Sand	200
0353054SS	2-½ in. (63.5mm) x #8	350	1 - T-15	4		
0353059SS		1750	2 - T-15	1		
075700000		100	1 715	12		
0353000DS	1 5/ in (41 7mm) v #0	100	1 - T-15	12		
0353004DS	1-⅓ in. (41.3mm) x #8	350	1 - T-15	4		
0353009DS		1750	2 - T-15	1 12	Dark Brown	
0353050DS	2 1/ : /67 5 #0	100	1 - T-15		_	
0353054DS	2-½ in. (63.5mm) x #8	350	1 - T-15	4		
0353059DS		1750	2 - T-15	1		
0353000CS		100	1 - T-15	12		
0353004CS	1-5% in. (41.3mm) x #8	350	1 - T-15	4		
0353009CS		1750	2 - T-15	1		22
0353050CS		100	1 - T-15	12	Ceder	200
0353054CS	2-½ in. (63.5mm) x #8	350	1 - T-15	4		
0353059CS		1750	2 - T-15	1		
0353100S		100	1 - T-15	12		
03531045	1-% in. (41.3mm) x #8	350	1 - T-15	4		
0353109S	, ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	1750	2 - T-15	1		
0353150S		100	1 - T-15	12	White	<b>*</b>
0353154\$	2-½ in. (63.5mm) x #8	350	1 - T-15	4		
0353159S	2 /2 1111 (00:011111) X 110	1750	2 - T-15	1		
		., 55				
0353000BS		100	1 - T-15	12		
0353004BS	1-5% in. (41.3mm) x #8	350	1 - T-15	4		
0353009BS		1750	2 - T-15	1	Brown	28
0353050BS		100	1 - T-15	12	DI OWIT	
0353054BS	2-½ in. (63.5mm) x #8	350	1 - T-15	4		
0353059BS		1750	2 - T-15	1		
0353000TS		100	1 - T-15	12		
0353000TS	1-5% in. (41.3mm) x #8	350	1 - T-15	4		
035300415 0353009TS	. 70 1111 (111.0111111) X #10	1750	2 - T-15	1	-	
0353050TS		100	1 - T-15	12	Tan	₹ <b>2</b> .
0353050TS	2-½ in. (63.5mm) x #8	350	1 - T-15	4		
035305413 0353059TS	2 /2 111. (03.311111) X #0	1750	2 - T-15	1	_	
033303313		1730	∠ I-IJ	<u>'</u>		

### **STAINLESS STEEL POWER BITS**



- Power bits come in each pail of exterior screws for convenience on the jobsite.
- 2 in. (50.8mm) long
- Premium Star Drive power bit allows for better connections







SKU#	DESCRIPTION	QTY	CT./MASTER
0333900	T-15 Star Drive Power Bit	3	10
0333910	T-20 Star Drive Power Bit	3	10
0333920	T-25 Star Drive Power Bit	3	10

### \*New and Available Q2 2022

# 316 STAINLESS STEEL MARINE GRADE

**Ring Shank Deck Nails** 



- For fastening wood patios and decks and other exterior wood-to-wood connections in corrosive environments
- · Diamond point starts easily
- Ring shank offers superior holding power and withdrawal force
- Checkered flat head provides a large striking surface, reducing hammer slippage for easy drive connection



SKU#	SIZE	QTY	SHANK	CT./MASTER
5246158S*	2-½ in. (63.5mm) x #8	1 lb.	Ring	4
5246155S*		5 lb.	Ring	12
5246178S*	3 in. (76.2mm) x #10	1 lb.	Ring	12
5246175S*		5 lb.	Ring	4
5246188S*	3-¼ in. (82.5mm) x #12	1 lb.	Ring	12
5246185S*		5 lb.	Ring	4
5246195S*	3-½ in. (88.9mm) x #16	25 lb.	Ring	12
5246199S*		25 lb.	Ring	4

# 316 STAINLESS STEEL MARINE GRADE

**Joist Hanger Nails** 



- For installing joist hangers to wood framing in corrosive environments
- Diamond point starts easily
- Smooth shank is fast and easy to drive
- Short, heavy gauge provides superior holding power
- Flat head provides a large striking surface for easy drive connection



SKU#	SIZE	QTY	SHANK	CT./MASTER
5096095S*	1-½ in. (38.1mm) x #9	5 lb.	Smooth	4

# 316 STAINLESS STEEL MARINE GRADE

Collated Ring Shank Framing Nails (21° Plastic Strip)



- For general construction, framing, deck, and fence building in corrosive environments
- Ring shank offers superior holding power and withdrawal force
- Round head provides greater resistance to pull out
- 21° plastic strip fits most 20°-22° framing nailers



SKU#	SIZE	QTY	SHANK
5710258S*	2-3% in. (60.3mm) x .113	1000	Ring
5710176S*	3 in. (76.2mm) x .120	1000	Ring
5710286S*	3-¼ in. (82.5mm) x .120	1000	Ring

# 316 STAINLESS STEEL MARINE GRADE

Collated Metal Hanger Nails (31° Paper Strip)



- For metal connectors, joist hangers, joist ties, and hurricane straps in corrosive environments
- Smooth shank provides good holding power
- · Round head provides greater resistance to pull out
- Metal hanger nail strip fits most 31° metal connector nailers



SKU#	SIZE	QTY	SHANK
5606090S*	1-½ in. (38.1mm) x .148	1000	Smooth

\*New and Available Q2 2022

# **NOTES**





#### **MICHIGAN**

2964 Clydon Ave SW Grand Rapids, MI 49519

### **NEW YORK**

5985 Tarbell Rd Syracuse, NY 13206

#### **GEORGIA**

555 Riverside Pkwy, Ste. 100 Austell, GA 30168

### **TEXAS**

3701 Yale St Houston, TX 77018

#### CALIFORNIA

8939 Etiwanda Ave Rancho Cucamonga, CA 91739

#### WASHINGTON

4512 70th Ave E Suite 400 Fife, WA 98424

FOR MORE INFORMATION, PLEASE VISIT WWW.CAMOFASTENERS.COM OR CALL 800-968-6245 TO SPEAK WITH A CAMO PRODUCT EXPERT.